


VOSS 1951

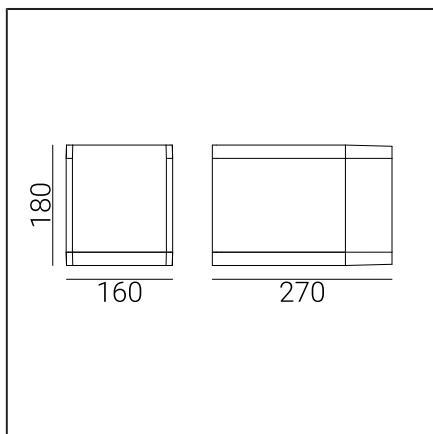

Art	E-nr	Färg	RAL
1951AL	7703176	ALUMINIUM	9006
1951GR	7703177	GRAFIT	7016

Allmän information

Typ armatur	
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	Glas - härdat, klart
Typ ljuskälla	LED modul + driver
Ljusstyrning	Ej dimbar
Netto / Bruttovikt armatur	5,1kg / 5,1kg
Förpackning mått [cm]	22,5x19,5x32
2xLED moduler	Cree Jx3030 3000K no.1805004
Drivdon	Philips Xitanium 20W/m 0.15-0,5A 54V 230V 12NC
Led modul effekt	9W
Armatur effekt	11,8W
Lumen modul	1258lm
Lumen ut	557,8lm
Led modul effekt	139,8lm/W
Armaturens effekt	47,3lm/W
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	50 000h
Energieffektivitetsindex (EEI)	A+
Effektfaktor	PF >0,95
Ta nominel:	+25°C
Inrush current	3,36A/36µs
Antal armaturer på automatsäkring	B 10A: 126, B 16A: 200, C 10A: 208, C 16A: 340

Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer

