


Vario P

IP20




3 x 0,75 5 x 0,75

DALI-2












PF≥0.9 CE

| Påputs-/pendelarmatur | Surface mnt./suspens. luminaire

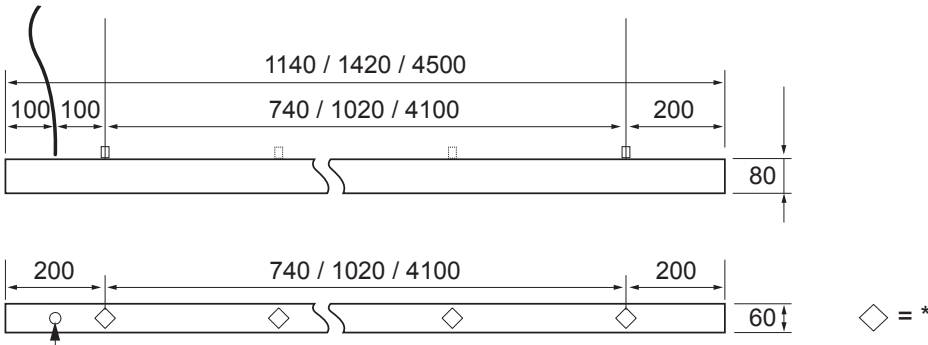

Kyttettävä erillisessä rasiassa. / Inkoppling via separat dosa. / Connection in a separate terminal box.

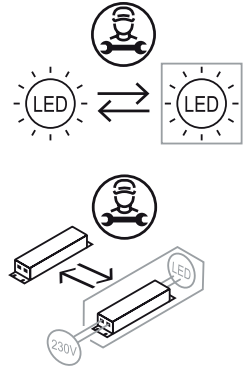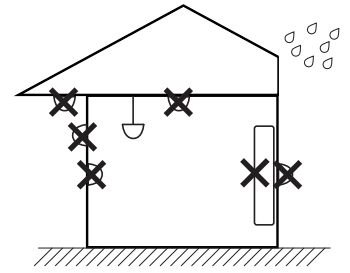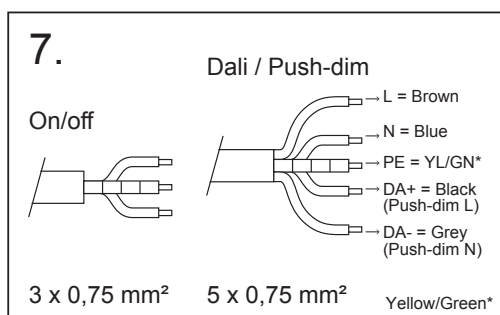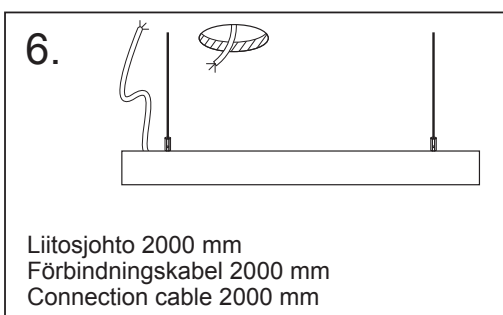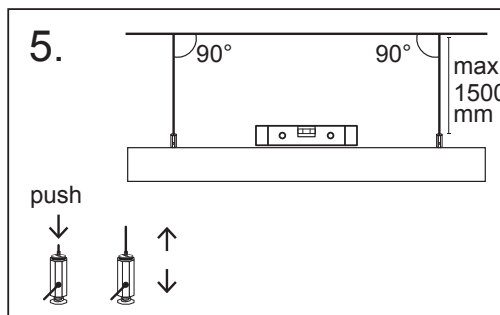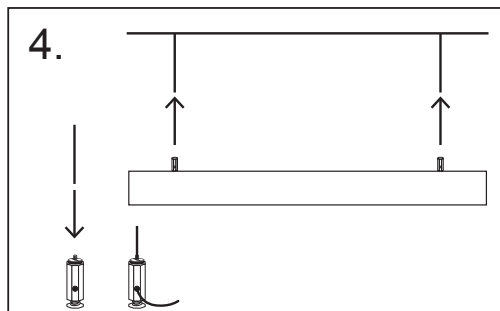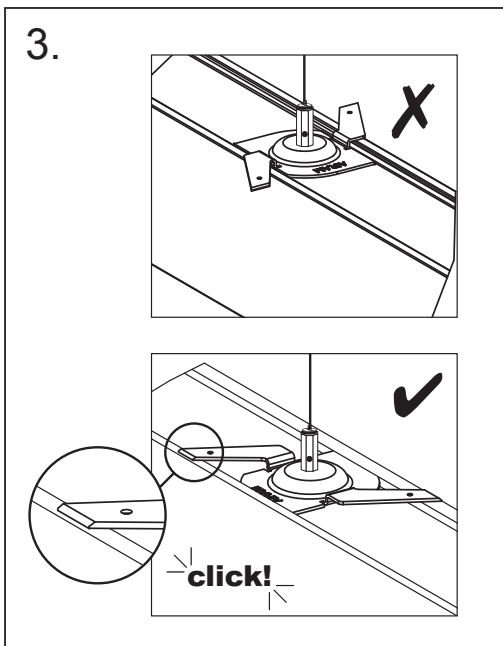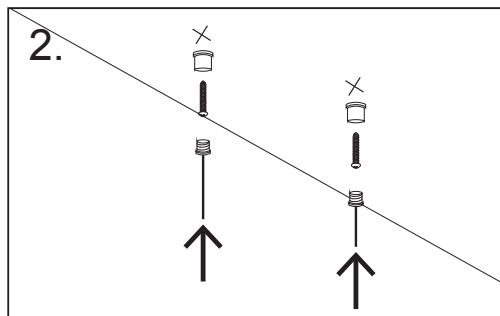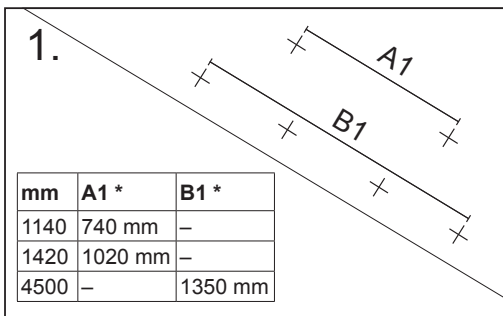

SE Denna produkt innehåller en ljuskälla med energieffektivitetsklass B.

Vi rekommenderar att installationen görs av en behörig elektriker. Använd endast driftspänning och frekvens som är märkt på armaturen/förkopplingsdosen. Bryt stömmen före installation eller service. Denna monteringsanvisning bör sparas och finnas tillgänglig vid installation eller framtida service. Ljuskällan i denna armatur ska endast ersättas av tillverkaren eller hans servicetekniker eller en liknande kvalificerad person.

EN This product contains a light source of energy efficiency class B.

Only a professional electrician is allowed to do the installation. Use only rated voltage and frequency as marked in the fixture/driver. Switch off the current before installation or service. This mounting instruction must be kept available during installation and for future maintenance. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.