Nat Ref. 70638

IK06 IP65

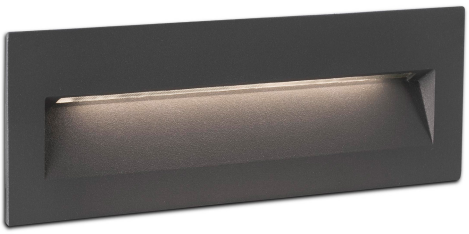

Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	8
Energy class light source	F
Light source	SMD LED
Light source included	Yes
Luminous Flux (lm)	496
Color temperature (K)	3000K
Opening angle degrees	120
CRI	>80
Driver included	Yes
Structure material	Aluminium
Diffuser material	PC
Structure finish	Dark Grey
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	215x65
Includes recessed box	Yes

Installation instructions

Energy label
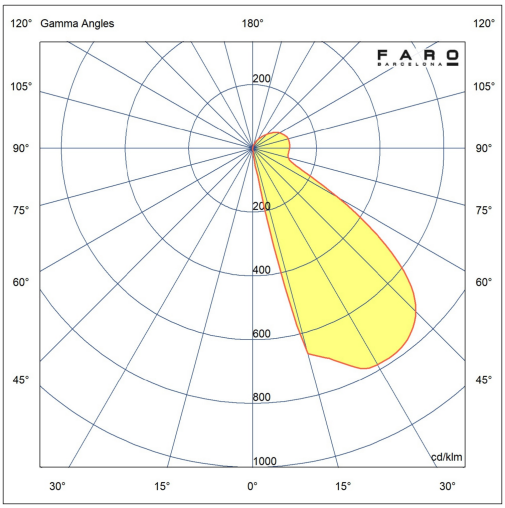
Photometric