

Strålkastare

GUELL LED

△-märkt IP66

Upp till
150 lm/W
och **20%**
förbättrad effekt




EUROPALJUS AB

GUELL O KIT LED

Färg	E.nr	W	lm	K	Spridning
Svart	77 617 11	15W	1603	4000	Symmetrisk
Vit	77 617 50	15W	1603	4000	Symmetrisk
Svart	77 647 93	28W	3162	4000	Symmetrisk
Vit	77 647 94	28W	3162	4000	Symmetrisk

L70 B10 150.000h


Finns även i 3000K och 5000K

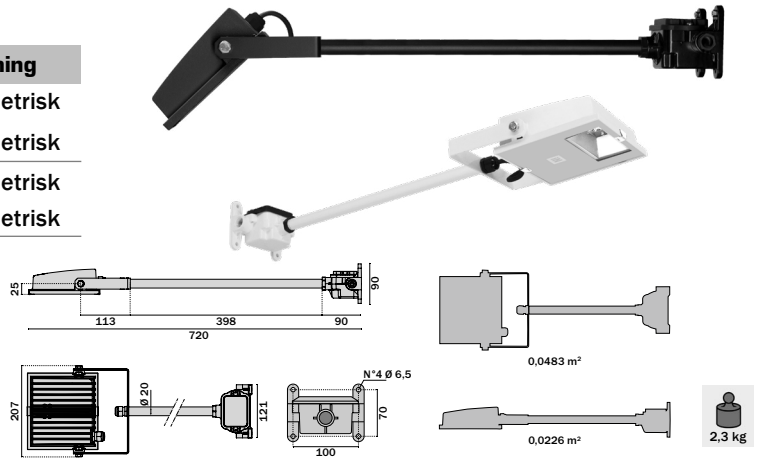

GUELL O LED

Färg	E.nr	W	lm	K	Spridning
Grå	77 616 85	15W	1603	4000	Symmetrisk
Grå	77 647 91	28W	3162	4000	Symmetrisk
Grå	77 616 87	15W	1589	4000	Asymmetrisk 30°
Grå	77 647 92	28W	3167	4000	Asymmetrisk 30°


L70 B10 150.000h

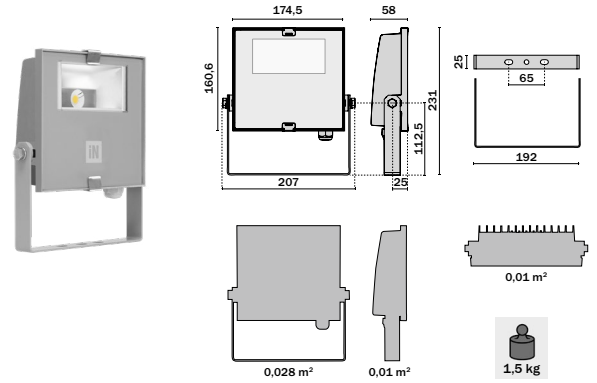


GUELL O SENSOR LED

Färg	E.nr	W	lm	K	Spridning
Grå	77 617 13	15W	1589	4000	Asymmetrisk
Grå	77 647 95	28W	3167	4000	Asymmetrisk

L70 B10 150.000h

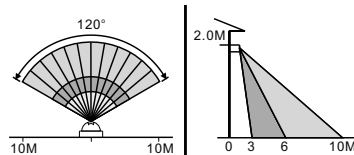

GUELL med sensor IP44.
Spridning; ovan & sidan.

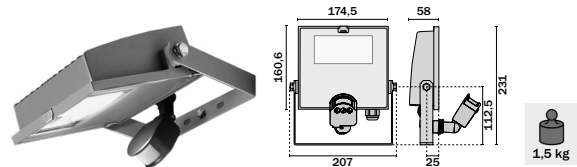

GUELL O KIT 15W




GUELL 1 SENSOR 51W

GUELL 1 LED

Färg	E.nr	W	lm	K	Spridning
Grå	77 616 37	36W	5391	4000	Symmetrisk
Grå	77 616 36	51W	6860	4000	Symmetrisk
Grå	77 616 39*	36W	5112	4000	Asymmetrisk 40°
Grå	77 616 38*	51W	6505	4000	Asymmetrisk 40°

L70 B10 150.000h


*DALI vid förfrågan.

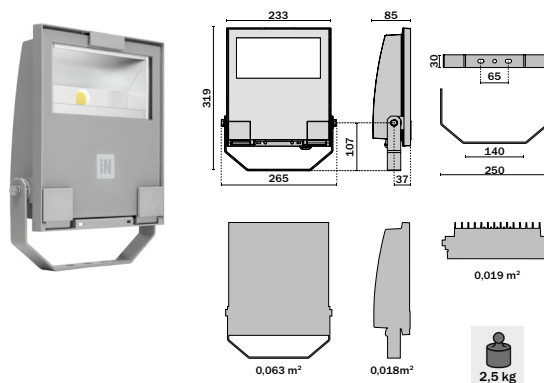


GUELL 1 SENSOR LED

Färg	E.nr	W	lm	K	Spridning
Grå	77 617 15	51W	6505	4000	Asymmetrisk

L70 B10 150.000h

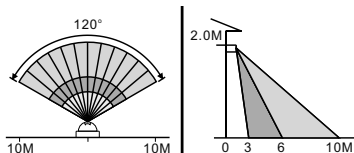

GUELL med sensor IP44.
Spridning; ovan & sidan.

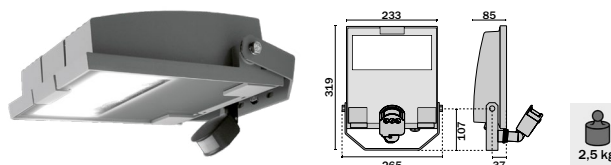

GUELL 2 LED


Färg	E.nr	W	lm	K	Spridning
Grå	77 616 35	74W	10463	4000	Symmetrisk
Grå	77 616 34	103W	13233	4000	Symmetrisk
NYHET	Grå 77 668 90	145W	20335	4000	Symmetrisk
Grå	77 616 29*	74W	10030	4000	Asymmetrisk 40°
Grå	77 616 32*	103W	13006	4000	Asymmetrisk 40°
NYHET	Grå 77 668 91	145W	20335	4000	Asymmetrisk 40°
Grå	77 664 87	80W	10032	4000	Asymmetrisk 50°

GUELL 2 74W L70 B10 150.000h

GUELL 2 80W, 103W L70 B10 130.000h

GUELL 2 145W L70 B10 100.000h

*DALI vid förfrågan.

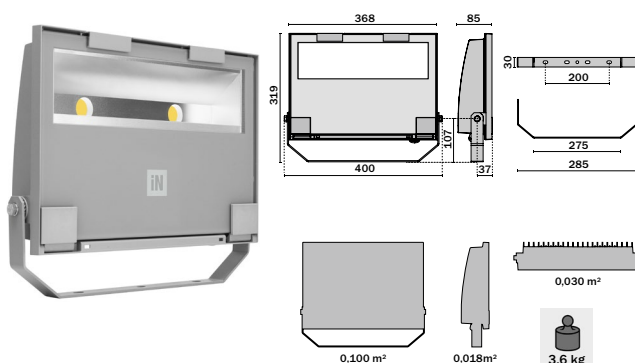

GUELL 2.5 LED


Färg	E.nr	W	lm	K	Spridning
Grå	77 645 28	154W	20345	4000	Symmetrisk
NYHET	Grå 77 668 92	200W	25323	4000	Symmetrisk
Grå	77 645 41**	230W	31072	4000	Symmetrisk
Grå	77 645 27	154W	20027	4000	Asymmetrisk 40°
NYHET	Grå 77 668 93	200W	25323	4000	Asymmetrisk 40°
Grå	77 645 38**	230W	30536	4000	Asymmetrisk 40°
Grå	77 645 39*	118W	13862	4000	Asymmetrisk 50°
Grå	77 645 40*	156W	18453	4000	Asymmetrisk 50°

GUELL 2.5 154W, 118W, 156W, 230W L70 B10 130.000h

GUELL 2.5 200W L70 B10 100.000h

*DALI vid förfrågan.

** 1-10V

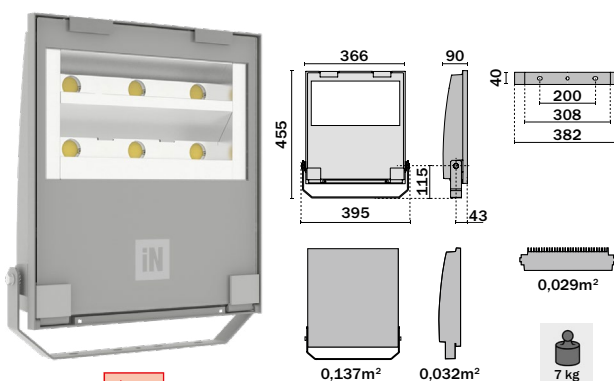

Överspänningsskydd

GUELL 3 LED


Färg	E.nr	W	lm	K	Spridning
Grå	77 681 46**	230W	29074	4000	Symmetrisk
Grå	77 681 48**	306W	39738	4000	Symmetrisk
Grå	77 681 45**	230W	28423	4000	Asymmetrisk 40°
Grå	77 681 47**	306W	38046	4000	Asymmetrisk 40°
Grå	77 645 29*	231W	27496	4000	Asymmetrisk 50°
Grå	77 645 30*	305W	35814	4000	Asymmetrisk 50°

GUELL 3 230W, 306W L70 B10 130.000h

GUELL 3 231W, 305W L80 B10 55.000h

*DALI vid förfrågan.

** 1-10V

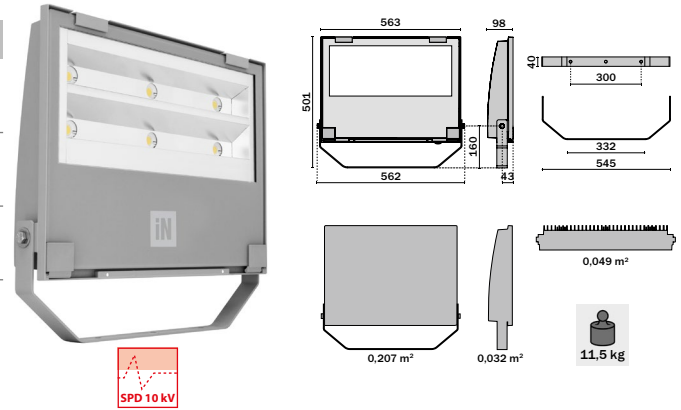

Överspänningsskydd


GUELL 4 LED

Färg	E.nr	W	lm	K	Spridning
Grå	77 624 76	413W	55007	4000	Symmetrisk
Grå	77 624 75*	413W	50303	4000	Asymmetrisk 40°
Grå	77 624 31*	448W	52346	4000	Asymmetrisk 50°

GUELL 4 1-10V 413W L70 B10 130.000h

GUELL 4 1-10V 448W L80 B10 55.000h

*DALI vid förfrågan.

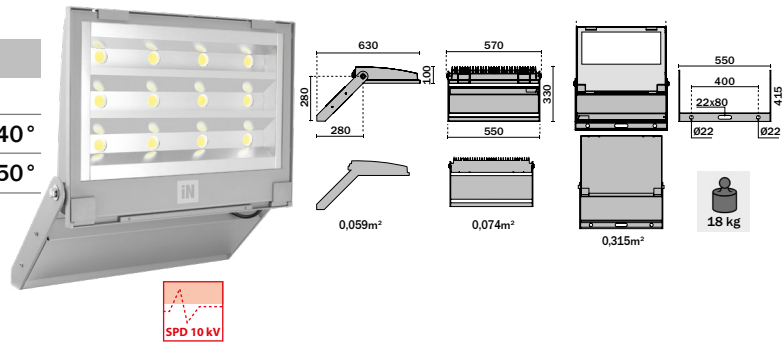

Överspänningsskydd

Montagehöjd GUELL Asymmetrisk 40° LED

Höjd: 5m GUELL 1 LED 36W 77 616 39 10x10m = 20lux	Höjd: 6m GUELL 1 LED 51W 77 616 38 10x10m = 25lux	Höjd: 7m GUELL 2 LED 74W 77 616 29 15x15m = 20lux	Höjd: 8m GUELL 2 LED 103W 77 616 32 15x15m = 25lux
Höjd: 10m GUELL 2.5 LED 154W 77 645 27 20x20m = 20lux	Höjd: 12m GUELL 2.5 LED 230W 77 645 38 20x20m = 30lux	Höjd: 18m GUELL 3 LED 306W 77 681 47 25x25m = 25lux	Höjd: 24m GUELL 4 LED 413W 77 624 75 30x30m = 20lux



GUELL 2 103W ASYM




GUELL 2 103W SYM

GUELL 1 Cirkulär LED

Färg	E.nr	W	lm	K	Spridning
Grå	77 643 39	39W	5335	4000	Cirkulär 20°
Grå	77 643 40	52W	6657	4000	Cirkulär 20°


L70 B10 150.000h

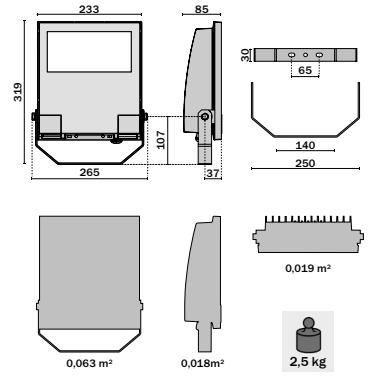

GUELL 2 Cirkulär LED

Färg	E.nr	W	lm	K	Spridning
Grå	77 643 41	72W	9470	4000	Cirkulär 20°
Grå	77 643 42	101W	11930	4000	Cirkulär 20°


L70 B10 150.000h

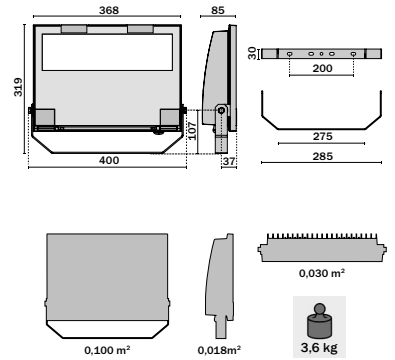

GUELL 2.5 Cirkulär LED


Färg	E.nr	W	lm	K	Spridning
Grå	77 645 42	156W	18471	4000	Cirkulär 20°
Grå	77 645 43**	232W	29640	4000	Cirkulär 20°

L70 B10 130.000h
**1-10V

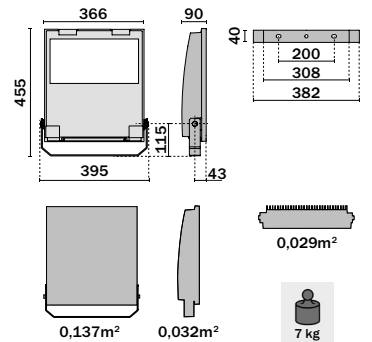


Ljusbild GUELL Cirkulär LED

GUELL 1 CIRKULÄR 20°

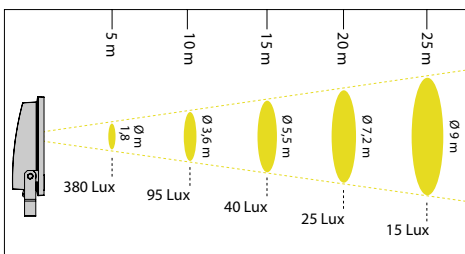


GUELL 1 Cirkulär 20° 39W

GUELL 2 CIRKULÄR 20°

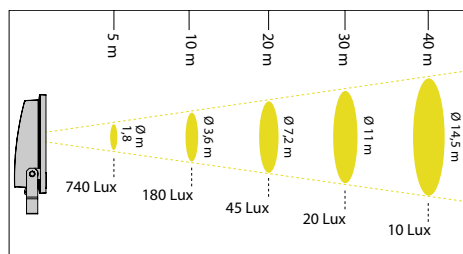


GUELL 2 Cirkulär 20° 72W


GUELL 2.5 CIRKULÄR 20°

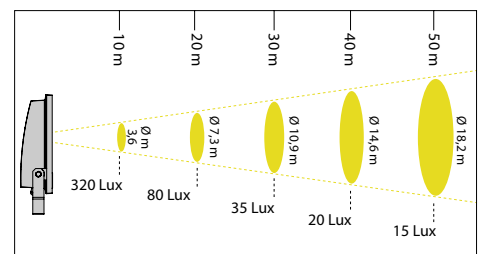


GUELL 2.5 Cirkulär 20° 156W

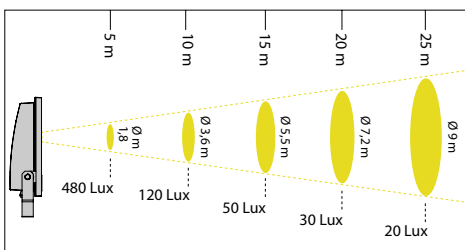

GUELL 1 Cirkulär 20° 52W

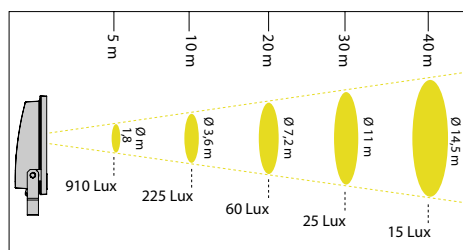

GUELL 2 Cirkulär 20° 101W

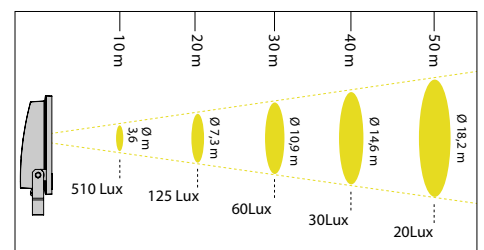

GUELL 2.5 Cirkulär 20° 232W

Tillbehör	Guell 0	Guell 1	Guell 2	Guell 2.5	Guell 3	Guell 4
¹ Väggarm galv 0,5m		77 651 33	77 651 33			
¹ Väggarm galv 1,0m		77 640 88	77 640 88	77 645 44	77 617 02	
² Skyddsgaller		77 616 41	77 615 57	77 645 47	77 616 98	77 616 98
³ Skärm			77 616 56	77 645 48	77 616 99	77 616 99
⁴ Lamellbländskydd symmetriskt		77 616 42	77 616 40		77 617 03	77 625 92
⁴ Lamellbländskydd asymmetriskt		77 616 43	77 615 58		77 617 04	77 625 93
⁵ Röradapter Ø50 till 60mm	77 617 77	77 617 77	77 617 77	77 617 77	77 617 77	
⁵ Röradapter Ø60 till 76mm		77 273 87	77 273 87	77 273 87	77 273 87	
⁶ Strålkastarbalk Ø60-76mm	77 794 06	77 794 06	77 794 06	77 794 06	77 794 06	77 794 06
⁷ Stolptoppfäste, enkelt		77 616 66	77 615 62	77 645 45	77 617 00	
⁸ Stolptoppfäste, dubbelt		77 616 69	77 615 59	77 645 46	77 617 01	
⁹ Stolpfäste enkelt Ø60-76mm	77 643 75	77 643 75	77 643 75	77 643 75		
¹⁰ Stolpfäste dubbelt Ø60-76mm	77 643 76	77 643 76	77 643 76	77 643 76		
¹¹ T-balk till trästolpe	77 794 51	77 794 51	77 794 51	77 794 51	77 794 51	77 794 51
¹² Fästplåt till armatur	77 619 46	77 619 46	77 619 47	77 619 47	77 619 48	
¹³ Fästplåt till arm		77 624 24	77 624 24	77 624 24		
¹³ Fästplåt till GUELL 0 KIT	77 632 97					
¹⁴ Rörfäste till stolpe Ø60mm	77 698 79	77 698 79	77 698 79			
¹⁵ Rörfäste m. fästplåt till arm	77 644 60	77 644 61	77 644 61			
¹⁶ Ytterhörnfäste		77 625 99	77 625 99	77 625 99		
¹⁷ Trevägsfäste Ø76mm		77 639 03	77 639 03	77 639 03	77 639 03	
¹⁸ Fyrvägsfäste Ø76mm		77 639 04	77 639 04	77 639 04	77 639 04	

